


PN 40 Y-TYPE STRAINER (BSPT)

Model: SYS-S-PN40

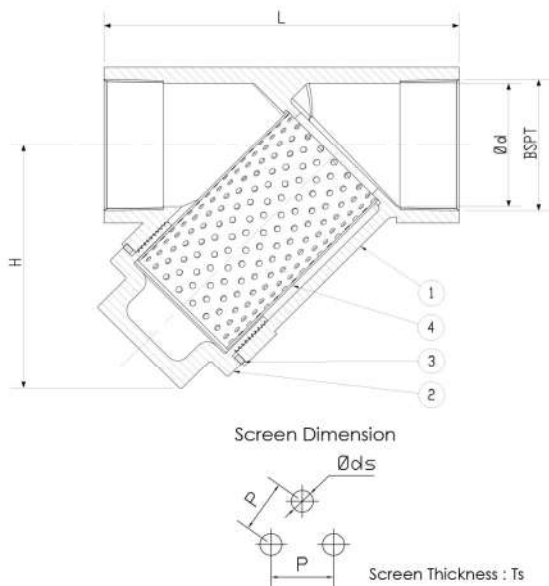

SPECIFICATIONS

- Stainless steel body and bonnet
- Screwed end (BSPT)
- Applicable temperature : -20 ~ 120 ° C
(Opt. -20 ~ 180 ° C for RPTFE gasket)
- Applicable media : W.O.G. and steam

STANDARD COMPONENT MATERIAL

NO	DESCRIPTION	QTY.	MATERIAL
1	Body	1	CF8M
2	Bonnet	1	CF8M
3	Gasket	1	PTFE (Opt. RPTFE)
4	Screen	1	Stainless Steel

TEST PRESSURE

Nominal Pressure	:	40 kgf/cm ²
Shell Test Pressure	:	60 kgf/cm ²

DIMENSION TABLE (MM)

DN	L	d	BSPT	H	P	ds	Ts	Weight (Kg)
15	60	18	1/2	40	2.7	1	0.5	0.20
20	70	23.2	3/4	43	2.7	1	0.5	0.30
25	86	29.2	1	50	2.7	1	0.5	0.46
32	103	37.9	1-1/4	65	2.7	1	0.5	0.76
40	112	44	1-1/2	69	2.7	1	0.5	1.00
50	140	55.6	2	88	2.7	1	0.5	1.72



ARITA VALVE MFG. (M) SDN. BHD.

The contents of this literature are for interaction purposes only. Arita is not responsible for suitability or compatibility of these Products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.