


CAST IRON Y-STRAINER JIS10K

ARF-805FE(J)

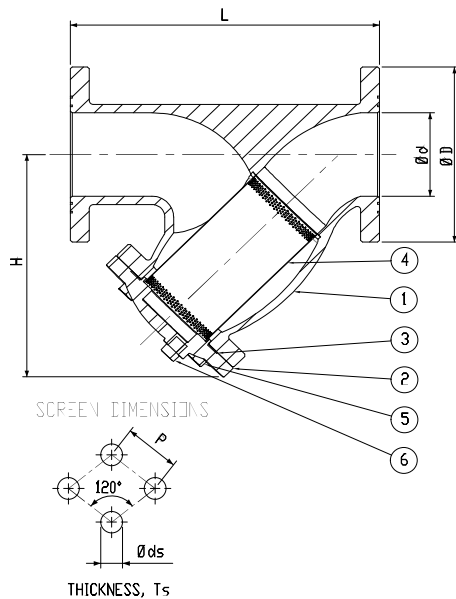

STANDARD COMPONENT MATERIAL

NO	DESCRIPTION	QTY.	MATERIAL
1	Body	1	Cast Iron
2	Cap	1	Cast Iron
3	Gasket	1	Non-Asbestos Sheet
4	Screen	1	Stainless Steel
5	Cap Bolt	4 ~ 12	Mild Steel
6	Plug	1	Mild Steel

SPECIFICATIONS

- Cast iron body and cap
- Flanged ends : JIS B2210
- Face to Face Dim. : Arita Std.
- Test Standard : JIS B2003
- Applicable temperature : -20 ~ 120 ° C
- Applicable media : W.O.G. and steam

TEST PRESSURE

Nominal Pressure	:	14 kgf/cm ²
Shell Test Pressure	:	21 kgf/cm ²

DIMENSION TABLE (MM)

Size		L	D	d	H	P	ds	Ts
DN	Inch							
40	1-1/2	193	140	40	110	3	1.5	0.5
50	2	234	155	50	160	3	1.5	0.5
65	2-1/2	270	175	65	190	3	1.5	0.5
80	3	295	185	80	210	3	1.5	0.5
100	4	355	210	100	260	3	1.5	0.5
125	5	400	250	125	300	5	3	0.7
150	6	455	280	150	330	5	3	0.7
200	8	554	330	200	400	5	3	0.7
250	10	660	400	250	500	5	3	0.7
300	12	795	445	300	600	8	5	0.8
350	14	910	490	350	650	8	5	0.8
400	16	1080	565	400	780	8	5	0.8

